

***FABRIJET***

**FT-1608 / FT-1908 SE**

6/8 COLOR DYE SUBLIMATION

with **Fluorescent** inks



**FABRIJET**  
**FT-1608 SE**

<b>Print Speed</b>	57 m <sup>2</sup> /hr	39 m <sup>2</sup> /hr	41 m <sup>2</sup> /hr	29 m <sup>2</sup> /hr
<b>Print Resolution</b>	720 x 360dpi 2 Pass	360 x 1,080dpi 3 Pass	540 x 720dpi 2 Pass	720 x 720dpi 4 Pass
<b>Max Print Width</b>	1,630 mm			
<b>Max Media Width</b>	1,650 mm			
<b>Print Mode</b>	Bi-Direction / Uni-Direction, Normal / Interleave			
<b>Printhead</b>	Panasonic printhead (6/8 heads)			
<b>Color</b>	6 Colors (CMYK + Lc, Lm / Fy, Fp) / 8 Colors (CMYK + Lc, Lm, Or, Bl / Fy, Fp, Or, Bl / Lc, Lm, Fy, Fp)			
<b>Ink</b>	DGI original water based Dye Sublimation Ink			
<b>Interface</b>	TCP / IP , USB 3.0			
<b>Environmental Range</b>	Temperature : 22.5~27.5 °C Humidity : 40~70% Environment condition may affect on final printing quality.			
<b>Electricity Requirements</b>	Single Phase 220V (50/60Hz, AC) Main 5A, 3.3Kw Heater 10A			
<b>Optional equipment</b>	Heavy load take-up system - up to 400m(58g) media loadable / 6 Liter bulk ink tank system			

※ All specifications are subject to change without notice.

**FABRIJET**  
**FT-1908 SE**


<b>Print Speed</b>	61 m <sup>2</sup> /hr	43 m <sup>2</sup> /hr	47 m <sup>2</sup> /hr	31 m <sup>2</sup> /hr
<b>Print Resolution</b>	720 x 360dpi 2 Pass	360 x 1,080dpi 3 Pass	540 x 720dpi 2 Pass	720 x 720dpi 4 Pass
<b>Max Print Width</b>	1,880 mm			
<b>Max Media Width</b>	1,900 mm			
<b>Print Mode</b>	Bi-Direction / Uni-Direction, Normal / Interleave			
<b>Printhead</b>	Panasonic printhead (6/8 heads)			
<b>Color</b>	6 Colors (CMYK + Lc, Lm / Fy, Fp) / 8 Colors (CMYK + Lc, Lm, Or, Bl / Fy, Fp, Or, Bl / Lc, Lm, Fy, Fp)			
<b>Ink</b>	DGI original water based Dye Sublimation Ink			
<b>Interface</b>	TCP / IP , USB 3.0			
<b>Environmental Range</b>	Temperature : 22.5~27.5 °C Humidity : 40~70% Environment condition may affect on final printing quality.			
<b>Electricity Requirements</b>	Single Phase 220V (50/60Hz, AC) Main 5A, 3.3Kw Heater 10A			
<b>Optional equipment</b>	Heavy load take-up system - up to 400m(58g) media loadable / 6 Liter bulk ink tank system			

※ All specifications are subject to change without notice.

## Dimensions for Installation

**FABRIJET**  
**FT-1608 SE**

	Uncrated				Crated			
	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
Printer	3,180	1,020	1,320	300	3,500	1,150	1,700	520

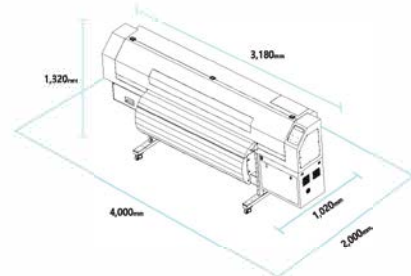

**FABRIJET**  
**FT-1908 SE**

	Uncrated				Crated			
	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
Printer	3,420	1,020	1,320	320	3,800	1,150	1,710	570

